



EXPAND MESH

BLUETOOTH® HEADSET WITH MESH INTERCOM™

QUICK START GUIDE

1.0.0

ENGLISH

Downloadable Sena Software

Download the Sena Outdoor App at [Google Play Store](#) or [App Store](#).

Sena Outdoor

- Device configuration setting

Download the following items at [sena.com](#).

Firmware

Sena Device Manager

- Firmware upgrade
- Device configuration setting


Quick Start Guide, User's Guide

Follow us on Facebook, YouTube, Twitter and Instagram to check the latest information and helpful tips.



SENA Technologies, Inc.
Customer Support: [sena.com](#)

Product Details

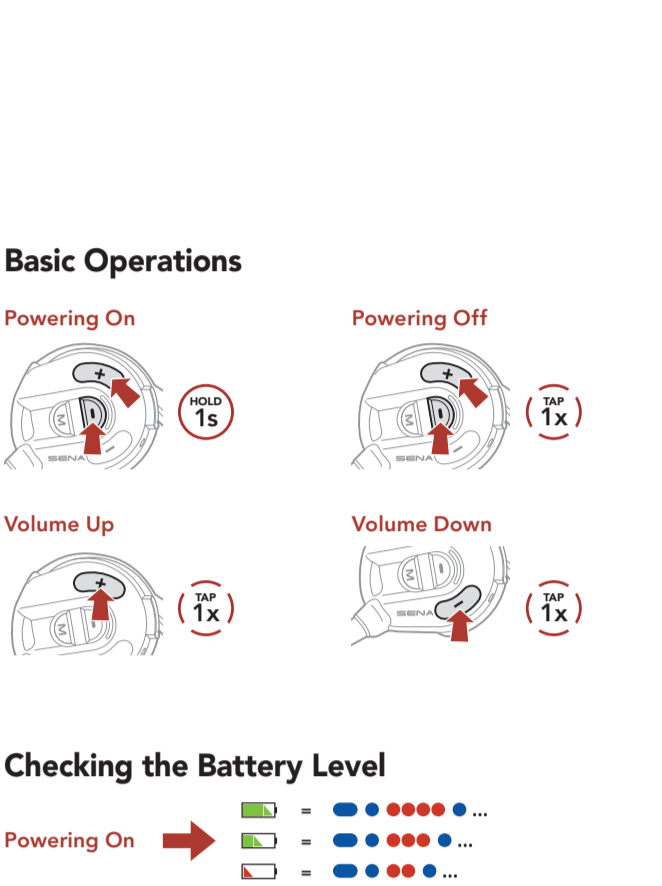

Wearing the Headset



• For more information about installation, refer to the User's Guide.

Icon Legend

- TAP 1x** Tap button the specified number of times
- HOLD 10s** Press and Hold button for the specified amount of time
- "Hello"** Audible prompt

Basic Operations

Powering On

Powering Off

Volume Up

Volume Down

Checking the Battery Level

Powering On →

Phone Pairing

① → "Phone pairing"

② Select **Expand Mesh** in the list of Bluetooth devices detected.

- The headset will enter the **Phone Pairing mode** automatically when you **initially turn on** the headset.
- For more information on phone pairing, refer to the User's Guide.

Using the Phone

Answer a Call

End a Call

Reject a call

Voice Dial

Music Control

Play/Pause →

Track forward

Track backward

Mesh Intercom™

Open Mesh™: communication within the same channel.
Group Mesh™: communication within the same private group.

- For more information on **Mesh Intercom**, refer to the User's Guide.

Mesh Intercom On → → "Mesh intercom on, Open Mesh, channel 1"

Mesh Intercom Off → → "Mesh intercom off"

Note: When **Mesh Intercom** is on, the **Expand Mesh** will automatically connect to nearby **Expand Mesh** users and the headset will be in **Open Mesh (default: channel 1)** initially.

Open Mesh

Channel Setting (Default: channel 1) in Open Mesh

Using the Button

① Enter into the **Channel Setting**.
 → "Channel setting, 1"

② Navigate between channels.
(1 → 2 → ... → 8 → 9 → Exit → 1 → ...)

→ "#"

or

→ "#"

③ Save the channel.
 → "Channel is set, channel #"

Using the Sena Outdoor App
You can select the channel through the **Sena Outdoor App**.

Group Mesh

Group Mesh is a closed group intercom function that allows users to join, leave, or rejoin a group intercom conversation without pairing each headset.

1) Creating a Group Mesh

Creating a **Group Mesh** requires **two or more Open Mesh users**.

Open Mesh

→

Group Mesh

① **Users (You, B, and C)** enter into **Mesh Grouping** to create a **Group Mesh**.
 → "Mesh grouping"

② When **Mesh Grouping** is completed, the **users (You, B and C)** will hear a voice prompt on their headset as **Open Mesh** switches to **Group Mesh**.
 "Group Mesh"

2) Joining an Existing Group Mesh

One or more current users in an **Existing Group Mesh** can allow **new users (one or more)** in **Open Mesh** to join the **Existing Group Mesh**.

Existing Group Mesh

Open Mesh

→

Existing Group Mesh

① **One (You) of the current users** in the **Existing Group Mesh** and **new users (D and F)** in **Open Mesh** enter into **Mesh Grouping** to join the **Existing Group Mesh**.
 → "Mesh grouping"

② When **Mesh Grouping** is completed, the **new users (D and F)** will hear a voice prompt on their headset as **Open Mesh** switches to **Group Mesh**.
 "Group Mesh"

Enable/Disable Mic (Default: Enable)

Users can enable/disable the microphone when communicating in a **Mesh Intercom**.

→ "Mic on" or "Mic off"

Reset Mesh

If a headset in an **Open Mesh** or **Group Mesh** resets the **Mesh**, it will automatically return to **Open Mesh (default: channel 1)**.

→ "Reset Mesh"

Configuration Menu

Accessing the Configuration Menu
 → "Configuration menu"

Navigating Between Menu Options

Execute Menu Options

Troubleshooting

Factory Reset

① → "Configuration menu"

② → "Factory reset"

③ → "Headset reset, good-bye"

Fault Reset

Note: **Fault Reset** will not restore the headset to the factory default settings.

Quick Reference

TYPE	OPERATION	BUTTON COMMANDS
Basic Operations	Power on	
	Power off	
	Volume up / Volume down	
Mobile Phone	Answer phone call	
	End/reject phone call	
	Voice Dial	
Music	Play/Pause music	
	Track forward	
	Track backward	
Mesh Intercom™	Mesh Intercom on/off	
	Channel setting	
	Mesh Grouping	
	Reset Mesh	
	Enable/Disable Mic	